



155M Single Fiber BIDI 1x9 Optical Transceiver

7113-311-1PI-FC

7116-211-1PI-FC

1.Feature

- 1×9 package with FC connector
- 1310nm FP Tx/1550nm PIN Rx and
- 1550nm DFB TX/1310nm PIN RX
- 20Km transmission with SMF
- +3.3V single power supply
- PECL compatible data input/output interface
- Low EMI and excellent ESD protection
- laser safety standard IEC-60825 compliant
- Compatible with RoHS



2.Application

- Ethernet
- Telecom

3.Description

The 1×9 transceiver supports 155Mbps and 20Km transmission distance with SMF.

The transceiver consists of two sections: The transmitter section incorporates a FP /DFBlaser. the receiver section consists of a PIN photodiode integrated with a trans-impedance preamplifier (TIA).

4.Performance specifications



4.1 Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	Tst	-40	+85	°C
Operating Temperature	Top	-40	+85	°C
Supply Voltage	Vcc	0	+3.3	V
Input voltage	Vin	GND	Vcc	
Lead Soldering Temperature & Time		240/10		°C/s

4.2 Operation Environment

Parameter	Symbol	Minimum	Maximum	Units
Supply Voltage	Vcc	3.15	3.45	V
Ambient operating Temperature	Top	-40	+85	°C
Operating Relative Humidity	-	5	95	%

4.3 Transmitter Section

(Ambient Operating Temperature -40°C to +85°C, Vcc =3.3 V)

Parameter	Symbol		Min.	Typ.	Max.	Units
Data rate	-		-	155	-	Mb/s
Center Wavelength	Tx 1310	λ_o	1260	1310	1360	nm
	Tx 1550		1540	1550	1560	
Output Spectral width	Tx 1310	$\Delta\lambda$	-	-	4	nm
	Tx 1550				1	
Average Optical Output Power	Tx 1310	Po	-15	-	-3	dBm
	Tx 1550		-15		-3	
Extinction Ratio	Er		8	-		dB



Rise/Fall Time(20%~80%)	Tr/Tf			0.26	ns
Total jitter	Tj			0.43	UI
Optical Eye Diagram	IEEE 802.3u and ANSI Fibre Channel Compatible				
Input differential impedance	Zdiff		100		Ohm

4.4 Receiver Section


(Ambient Operating Temperature -40°C to +85°C, Vcc =3.3V)

Parameter	Symbol	Min.	Typ.	Max.	unit	
Data rate			155		Mb/s	
Wavelength	Rx 1550	λ	1500	1550	1600	nm
	Rx 1310		1260	1310	1360	
Receiver Sensitivity	Rx 1550	Rsen	-		-32	dBm
	Rx 1310				-32	
Receiver Overload	Rov	-3				
Output differential impedance	Zdiff		100		Ohm	
LOSS Thresholds	LOSS _D	-	-	-33	dBm	
	LOSS _A	-45				


5.Pin Description



Pins	Name	Discription	NOTE
1	VeeR	Receiver Ground	
2	RD+	IReceived Data Output (PECL)	
3	RD-	Inv.ReceivedData Output (PECL)	
4	SD	Signal Detected (PECL)	
5	VccR	Receiver Power	
6	VccT	Transmitter Power	
7	TD-	Inv. Transmit Data Input (PECL)	
8	TD+	Transmit Data Input (PECL)	
9	VeeT	Transmitter Ground	

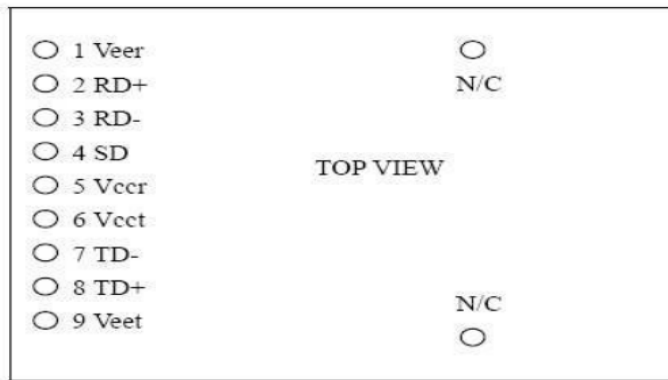

6.Recommended Circuit

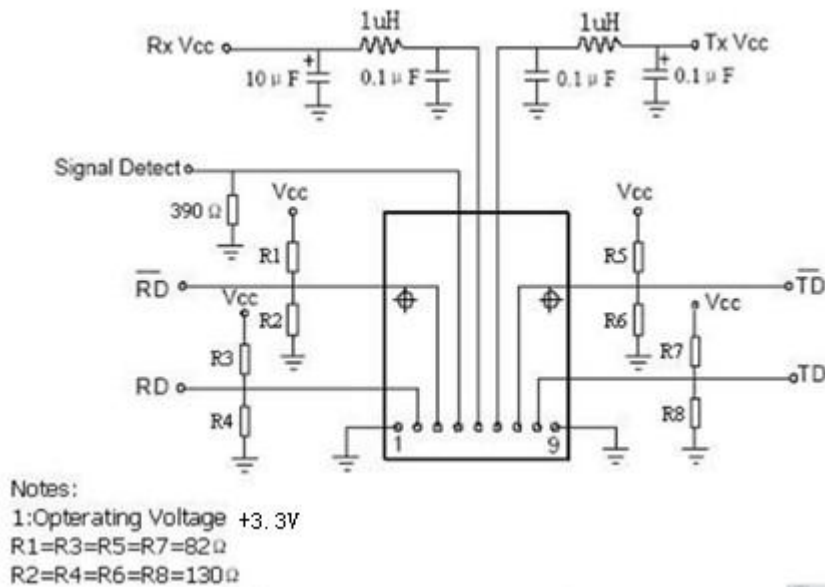

7.Mechanical Dimensions

