

CM5728-4WF24GT

28-Port Layer 3 Managed Rack-Mounted Ethernet Switch, with 4*10 Gigabit Fiber Ports and 24 Gigabit Copper Ports



- Provides 4*10 Gigabit fiber ports and 24 Gigabit copper ports
- Fanless design, IP30 protection grade, impact-resistant metal enclosure
- Applicable voltage: AC220V
- Meets EMC electromagnetic compatibility requirements (lightning, electrostatic discharge, surges, burst pulses).
- Supports various management methods including Web, CLI, Telnet, SSH, and bilingual (Chinese/English) Web interfaces.
- Supports ERPS, STP, RSTP, and MSTP configuration.
- Supports static routing, RIP, dynamic routing OSPF, VRRP, smart stacking, IS-IS, BGP and PIM.
- Supports SNMP V1/V2c/V3.



Product profile

CM5728-4WF24GT is a layer 3 rack-mounted managed switch designed to meet communication system requirements. It features 4*10 Gigabit fiber ports and 24 Gigabit copper ports. It supports various management methods including Web, CLI, and Telnet, as well as SNMPv1/v2c/v3-based network management software. It also supports layer 3 functionalities, including static routing, RIP, dynamic routing OSPF, VRRP, smart stacking, IS-IS, BGP, PIM, as well as rich layer 2 functionalities such as

RMON, port mirroring, QoS, LLDP, DHCP, file management, log management, port statistics, ARP user privilege classification, ACL, NAT, port alarms, storm control, Telnet/SSH configuration, DHCP Snooping, 802.1Q VLAN, port aggregation, port loopback, bandwidth management, flow control, port isolation, static multicast, multicast routing, and IGMP-Snooping. The user-friendly management system interface ensures easy operation, providing you with a good user experience.

Product features

- Supports 4K 802.1Q VLAN, simplified network planning;
- Supports IGMP Snooping and GMRP for filtering multicast traffic;
- Supports dual IPv4/IPv6 protocol stack;
- Line-speed L2/L3 forwarding capability, 10 Gigabit uplink port;

- QoS (IEEE 802.1p and DSCP) improves data transfer certainty;
- RMON provides more effective network monitoring and prediction capabilities;
- Port mirroring function to assist in online troubleshooting.
- Supports 255 vlan-based and mac-based ACL access controls;
- Supports one-click factory reset.

Product properties

Applicable standards

IEEE 802.3i 10Base-T IEEE 802.3u 100Base-T
 IEEE 802.3ab 1000Base-T IEEE 802.3z 1000Base-SX/LX
 IEEE 802.3ae 10GBase-X
 IEEE 802.3ad Link Aggregation IEEE 802.3x Flow Control
 IEEE 802.1p Priority IEEE 802.1Q VLAN
 IEEE 802.1D STP IEEE 802.1w RSTP
 IEEE 802.1s MSTP IEEE 802.1p QoS

Protocols

IGMP Snooping, GMRP, GVRP, DHCP, SNMPv1/v2c/v3, TFTP,
 NTP, SNTP, Ping, Traceroute, RMON, HTTPS, SSH, Telnet, Syslog,
 ERPS, MLD, LLDP, LACP, ACL, VRRP, RIP, OSPF, BGP, IS-IS,
 PIM

MIB: MIB-II, BRIDGE MIB, Ethernet MIB, IF MIB, RMON MIB
Group 1, 2, 3, 9

Switching features

QoS queue: 8 **Packet forwarding rate:** 252 Mpps
VLAN-ID: 1-4094 **Back plane bandwidth:** 598 Gbps
List of MAC addresses: 8K
Message buffer size: 42 Mbit

Port

Serial port: RS-232 (port type: RJ45 slot)
Gigabit fiber port: 10G/1000 Mbps (port type: SFP slot)
Gigabit copper port: 10/100/1000 Mbps self-adaptive, Full/Half duplex mode, MDI/MDI-X supported.
LED indicator: PWR, Link/ACT, SPD, RUN

Power source requirement

Input voltage: AC220V

Physical properties

Enclosure: Metal IP30
Size: 440 mm*208 mm*44 mm
Weight: 4380 g

Mounting method: Rack-mounted

Environmental restrictions

Working temperature: -40 ~ 45°C (-40 ~ 113°F)
Storage temperature: -40 ~ 85°C (-40 ~ 185°F)
Relative ambient humidity: 5 ~ 95% (non-condensing)

Standards and certification

EMS:
 IEC 61000-4-2 ESD level 3, IEC 61000-4-4 EFT level 4,
 IEC 61000-4-5 Surge level 4

Anti-vibration performance: IEC 60068-2-6

Shock resistance: IEC 60068-2-27

Free fall: IEC 60068-2-32

Certification: CE, FCC, and RoHS

MTBF (mean time between failures)

Time: 500,000 h


Warranty

Quality assurance: 3 years

Fiber properties

| | 1000BaseFX | | 10GBaseFX | |
|----------------------------|------------|---------------|-----------|-------------|
| | Multimode | Single mode | Multimode | Single mode |
| Wavelength | 850 nm | 1310 /1550 nm | 850 nm | 1310 nm |
| Maximum transmission power | -3 dBm | 0 dBm | 0 dBm | 1 dBm |
| Minimum transmission power | -9 dBm | -10 dBm | -6 dBm | -6 dBm |
| Receiving sensitivity | -19 dBm | -22 dBm | -11 dBm | -13 dBm |
| Link budget | 10 dB | 12 dB | 5 dB | 7 dB |
| Typical distance | 550 m | 20 km | 300 m | 10 km |
| Saturation | -3 dBm | -3 dBm | -3 dBm | -3 dBm |

Product size (mm)

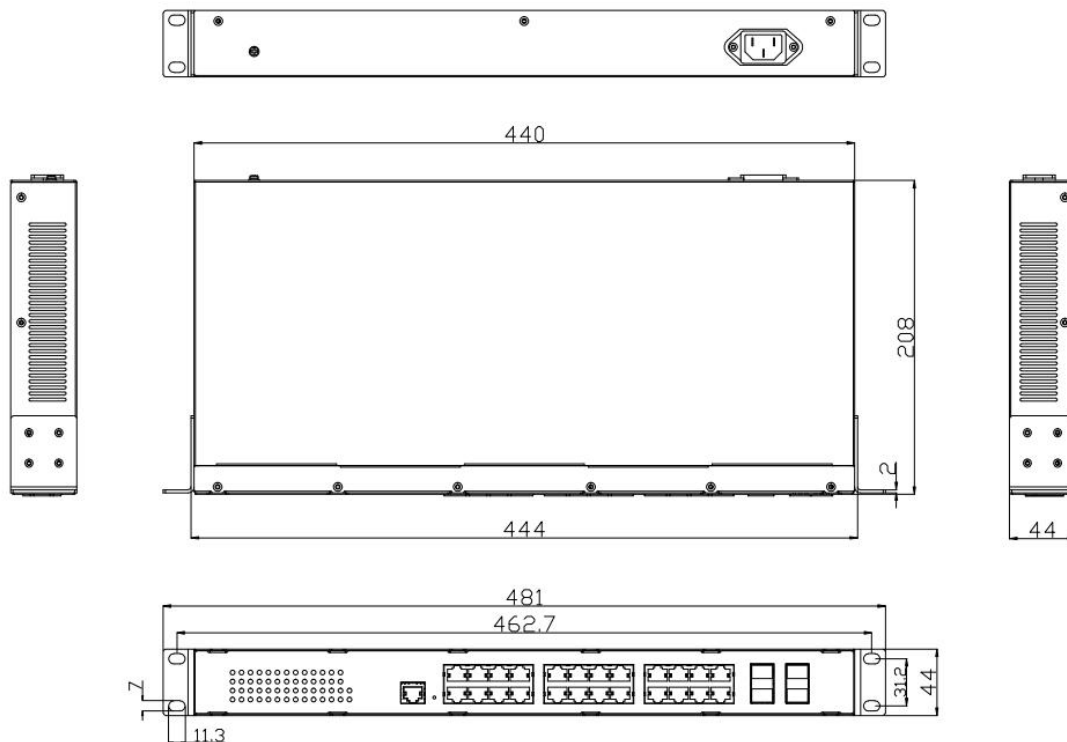

Order information

| Optional model | Port type | | | |
|----------------|-------------|------------------|-----------------------|-----------|
| | 10/100BaseT | 10/100/1000BaseT | 1000BaseFX | 10GBaseFX |
| | | | Single mode/multimode | |
| CM5728-4WF24GT | - | 24 | - | 4 |

Packing list

- Ethernet Switch
- Installation Accessories
- User Manual
- Warranty Card & Certificate of Conformity